

# TSW010

## DIN RAIL SWITCH

// TSW010 offers the most affordable way to extend network connectivity to multiple Ethernet devices.

// Five 10/100 Ethernet ports ensure stable and reliable connectivity, sufficient for most industrial applications where high throughput is not required.

// Wide range of supported power supply voltages (9-30 V) and rugged design make it suitable for professional solutions.

// Compact size and integrated DIN rail bracket enable easy installation across different industrial environments.



### PLUG-N-PLAY

No additional configuration needed

### MOUNTING

Integrated DIN rail bracket and surface mounting options

### 9-30 V

Wide range of supported power supply voltages

### INDUSTRIAL DESIGN

Anodized aluminum housing and panels



# KEY FEATURES


## HARDWARE

Power supply	2-pin industrial DC power socket, 9 - 30 VDC
Power consumption	Idle: 0.3 W / Max: 0.9 W
Status LEDs	1 x Power LED, 10 x LAN status LEDs
Ethernet	5 x RJ45 ports, 10/100 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az, IEEE802.3x (Flow control) standards, supports auto MDI/MDIX crossover, Auto-Negotiation function
Ingress protection rating	IP30
Operating temperature	-40 °C to 75 °C
Housing	Anodized aluminum housing and panels
Dimensions	113.1 x 27.4 x 80.5 mm
Weight	146.5 g
Installation	Integrated DIN rail bracket, wall mounting (additional kit needed), flat surface placement

## PERFORMANCE SPECIFICATIONS

Bandwidth (Non-blocking)	1 Gbps
MAC address table size	2K entries
Jumbo frame support	2048 bytes
Switch Processing Scheme	Store-and-Forward

### FRONT VIEW

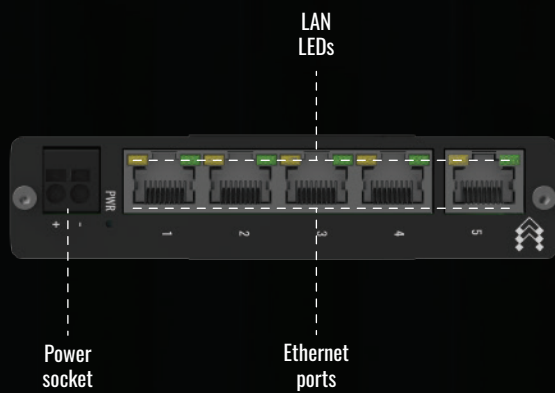

### BACK VIEW

